



Just Roof 4



Integrated design for rapid installation
Reduce maintenance cost



Proprietary material formulation
Resistant to aging, damp heat and corrosion



Fast and efficient

Accelerate the survey and design process of C&I projects
No drilling, no damage to the roof, and no need cement ballast
Less than **1 minute/set**, tremendously reducing labor cost
Less operation and maintenance



Economical and environmentally friendly

Environmentally friendly materials meet water use standards
100% recycled and low carbon emission
Heat absorption by water can reduce the roof temperature



Strengthened structure and connection
Strong wind resistance



25 years service life
10-year product warranty



Safe and reliable

Patent **UV-resistant, anti-aging and anti-corrosion HDPE**
Can withstand **40M/S winds** (typhoon level 13 equivalent)
and **1KN/M² snow load**
Strengthened and reliable bottom and connection design
Rigor testing in authoritative labs and long time track



Integrated modular design

Suitable for PV module and string configurations
Compatible with **mainstream modules**
Optimized solutions for specific projects

Application Cases



Sanmenxia, Henan



Jincheng, Shanxi



Suzhou, Jiangsu



Malaysia Sarawak



Nan'an, Fujian




Zhumadian, Henan



Malaysia Selangor




Zhengzhou, Henan

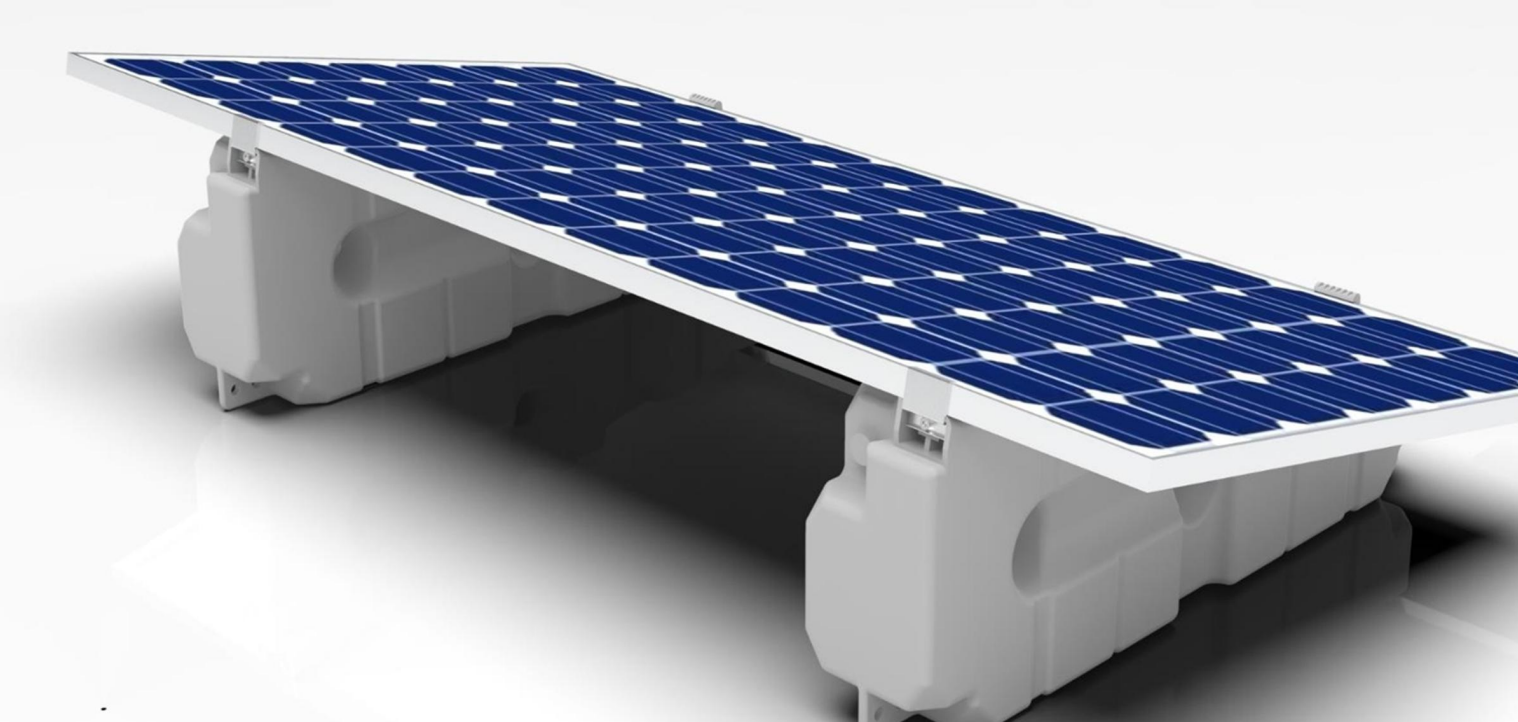

Landscape

Type	JUST ROOF-R3	Module orientation	Horizontal
Installation Location	Concrete level roof/Ground	Weight	<6kg / pcs
Installation Angle	12°	Module Type	30mm, 35mm frame
Module Size	(W:1134mm* L:unlimited)	Maximum Water Load	110kg(55kg/pcs)
Loaded Type	Loaded water	Fastener Materials	AL6005-T5
Materials	HDPE High Density Polyethylene + Resist UV Anti aging materials	Volume	10 pcs/0.67m³
Dimension	1150*220*383mm	Recyclability of materials	Yes
Installation Time	<1 min/ set	Warranty	25-year lifecycle 10-year warranty
Working Temprature	-40°C to 85°C	40-Foot High Container Fully Loaded	550 sets
20-Foot Container Fully Loaded	220 sets	17.5 m Van Truck Packing	825 sets ①
13 m Van Truck Packing	480 sets ①		

Note: ① The shipment quantity may vary due to the size of the vehicle

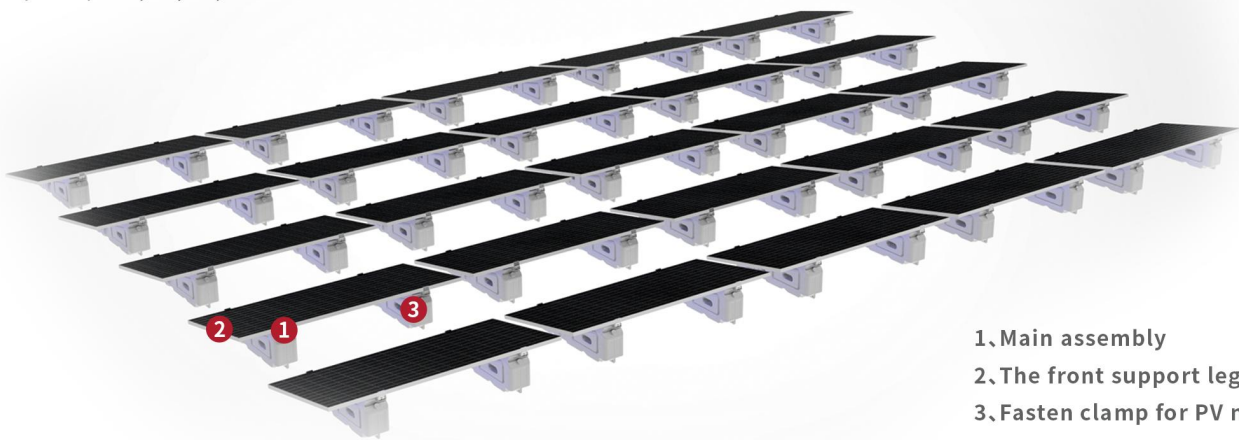


- 1、Main assembly
- 2、The front support leg
- 3、Fasten clamp for PV module



Portrait

Type	JUST ROOF-R4	Module orientation	Vertical
Installation Location	Concrete level roof/Ground	Weight	<5.5kg/Unit
Installation Angle	5°	Module Type	Unlimited
Wind Resistance	Depends on the system's maximum weight and project-specific design conditions. Applicable wind speed may vary.	Maximum Water Load	120kg/Unit
Module Size	Unlimited	Fastener Materials	AL6005-T5
Loaded Type	Loaded water	Volume	4 Units/0.62m³
Materials	HDPE High Density Polyethylene + Resist UV Anti aging materials	Recyclability of materials	Fully recyclable
Dimension	415*300*1470 mm	Warranty	25-year lifecycle 10-year warranty
Installation Time	<1 Minute/Module	40-Foot Container Fully Loaded	452 Sets
Working Temprature	-40°C to 85°C	Van Truck Packing	702 Sets ①
20-Foot Container Fully Loaded	198 sets		
13 m Van Truck Packing	416 sets ①		

Note: ① The shipment quantity may vary due to the size of the vehicle

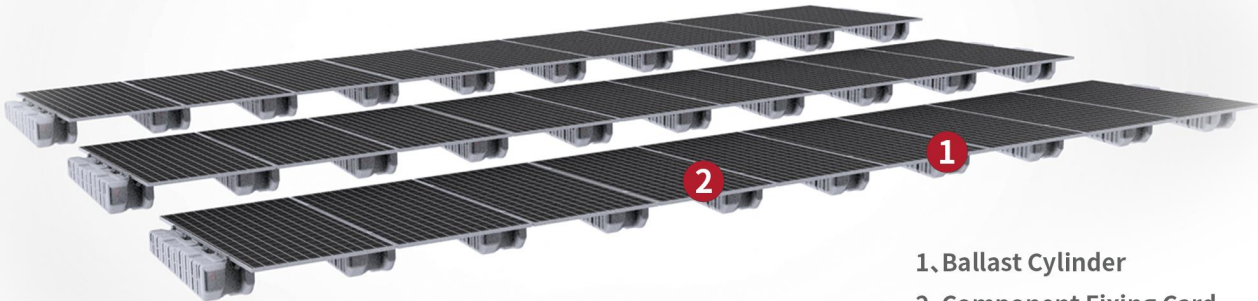

- 1、Ballast Cylinder
- 2、Component Fixing Card